



ニッケル

組ネジ (製本ビス, 帳ビス)

材質：真鍮(4~8mm) ※オネジ(大頭)は鉄／鉄(10mm~)
表面処理：ニッケルメッキ

	d	D	L
4.5×4	4.5	8.5	4
4.5×6	4.5	8.5	6
4.5×8	4.5	8.5	8
4.5×10	4.5	9	10
4.5×12	4.5	9	12
4.5×15	4.5	9	15
4.5×18	4.5	9	18
4.5×20	4.5	9	20
4.5×24	4.5	9	24
4.5×27	4.5	9	27
4.5×30	4.5	9	30
4.5×33	4.5	9	33
4.5×36	4.5	9	36
4.5×40	4.5	9	40
4.5×45	4.5	9	45
4.5×50	4.5	9	50
4.5×55	4.5	9	55
4.5×60	4.5	9	60
4.5×65	4.5	9	65
4.5×70	4.5	9	70
4.5×80	4.5	9	80
4.5×90	4.5	9	90
4.5×100	4.5	9	100

(単位:mm)

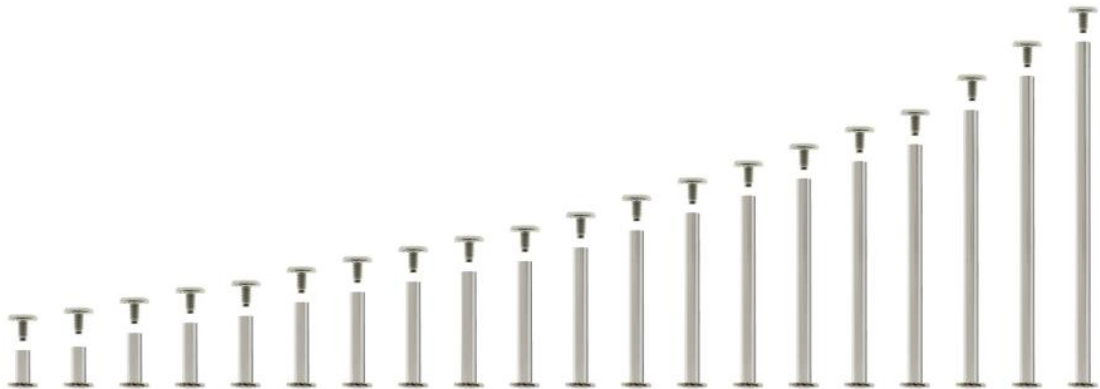


ニッケル

つなぎ (中継ビス)

材質：真鍮
表面処理：ニッケルメッキ

	D	L
4.5×6	4.5	6
4.5×8	4.5	8
4.5×10	4.5	10
4.5×12	4.5	12
4.5×15	4.5	15
4.5×20	4.5	20
4.5×30	4.5	30
4.5×40	4.5	40
4.5×50	4.5	50
4.5×100	4.5	100

(単位:mm)



PE

プッシュパイプ

材質：PE

	d	D	L
5×5	5	9.5	5
5×6	5	9.5	6
5×8	5	9.5	8
5×10	5	9.5	10
5×12	5	9.5	12
5×15	5	9.5	15
5×18	5	9.5	18
5×20	5	9.5	20
5×24	5	9.5	24
5×27	5	9.5	27
5×30	5	9.5	30
5×33	5	9.5	33
5×36	5	9.5	36
5×40	5	9.5	40
5×45	5	9.5	45
5×50	5	9.5	50
5×55	5	9.5	55
5×60	5	9.5	60
5×65	5	9.5	65
5×70	5	9.5	70
5×80	5	9.5	80

(単位:mm)